

HEAT SEAL INNOVATION – THE INDUSTRIES ONLY NSF CERTIFIED & ENERGY SMART OVERWRAPPER

FEATURES

- Durable etched metal Seal Plate ensures even heat distribution and longer service life.
- Seal Plate is engineered for superior water resistance, ideal for wet meat rooms and rigorous cleaning routines.
- Photo Eye accurately detects all tray colors and triggers the heating cycle seamlessly.
- Dual LED Light Indicator Indicates Heating Status
- Energy Smart Microprocessor Reduces Power Consumption by 80%
- Local Utility Rebates may be Available



MODEL SPECS

MODEL	700ES - E
FILM MOUNT	Cradle System
FILM CAPACITY	20" Maximum Roll Width, 8" Maximum Roll Diameter
SEAL PLATE	6" x 15"
OVERALL DIMENSIONS	24.75" D, 23" W, 9" H (63 D, 59 W, 23 H cm)
ELECTRICAL SPECIFICATIONS	 120 Volt, 60Hz, 162 Watts
SEAL PLATE TEMPERATURE	Maximum Temperature 380°F
WEIGHT	28 lbs. (13kg)
OTHER FEATURES	No Assembly Required, Quick Film Changeover
COMPARABLE TO	600A




OTHER FEATURES

- Square Edged Hot Rod Cuts Film with Ease
- Circuit Breakers Allow for Fast, Easy Reset and Low Maintenance
- Rigid Aluminum and Stainless Steel Construction
- Supplied with a Replaceable Non-Stick Cover to Maintain a Hygienic Sealing Surface

SERIES E REPLACEMENT PARTS

6" x 15" Control Board
(C-1818037)

Series E Seal Plate 6" x 15"
(C-6137338)

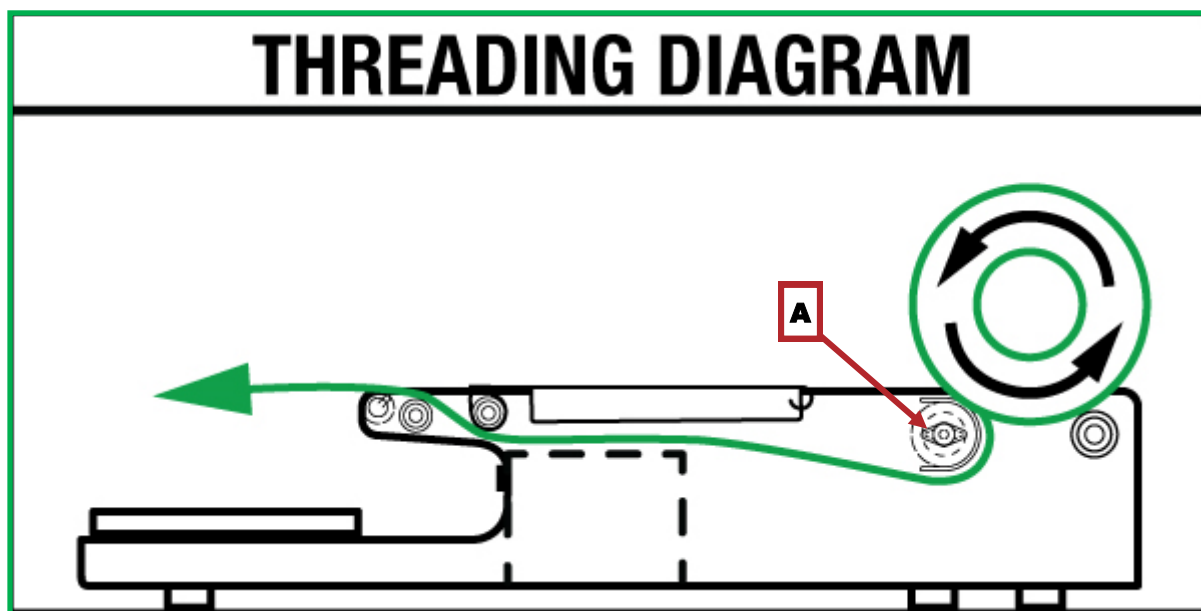

FILM THREADING

1. Facing the tension knob (A) side of the machine, the film should come off the roll counter-clockwise and **pass in-between the two rollers it sits on.**
2. Pull the film under the wrapping bridge and cut it with the hot rod.
3. The black tension knob (A) can be adjusted for proper tension on the film.

